SPC-1881WP

18.5" WXGA TFT LED LCD stationary Multi-Touch Panel Computer with Intel i3 processor



2013



Features

- 18.5" WXGA TFT LED LCD display
- Intel® Core™ i3-4010U 1.70 GHz Processor
- 16:9 wide screen with PCT multi-touch
- Built-in function and home key button used for intuitive UI
- Anti-scratch touch surface: 7H hardness
- All around IP65 with waterproof M12 connector
- Support Mini-PCle expansion slot
- Front LED indicator to show operating status
- Fanless cooling system
- Winner of the 2013 iF product design award



Introduction

With a brand-new ID design, the SPC-1881WP series provide high resolution 18.5" display and PCT multi-touch in 16:9 wide format. By embedding an with Intel® Core™ i3-4010U 1.70 GHz Processor, the SPC-1881WP can support advanced graphical performance in more complex applications. Built-in function and home key button for greater user usability and operating safety. The SPC-1881WP also supports Mini-PCle slot for communication function expansion. Moreover, the SPC-1881WP includes an all around IP65 waterproof design with M12 connectors. With this vertical I/O connector, cable routing can be an easy job in stationary / VESA Arm applications.

Specifications

General

Certification
BSMI, CCC, CE, FCC Class A, UL

• Cooling System Fanless design

Dimensions (W x H x D) 488 x 309 x 65mm (19.21" x 12.17" x 2.56")
Enclosure Front bezel: Die-cast Aluminium alloy

From Dezer: Die-Cast Aluminium alloy

Back housing: Die-cast Aluminium alloy

Mounting VESA Arm

OS Support Microsoft® Windows WES7 32bit/64bit / Windows 7

32bit/64bit / Win EMB 8.1 Industry Pro / Windows 10 $\,$

IOT Enterprise

■ Power Consumption 35 W Typical

Power Input 24 V_{DC}

Weight (Net)
8 kg (17.64 lbs)

System Hardware

■ CPU Intel® Core™ i3-4010U 1.70 GHz Processor

Chipset Integrated Intel 8 Series Chipset
Memory 4GB SO-DIMM DDR3 SDRAM

LAN 10/100/1000Base-T x 2 (connection:M12 A-coding,

8-pin female)

Expansion Slots
Full-sized Mini PCI-E x 1 (optional)

• Storage 2.5" SATA HDD

■ I/O RS-232 x1 (connection:M12 A-coding, 8-pin male)

USB 2.0 x1 (connection:M12 A-coding, 8-pin female) 24 V_{DC} power input (connection:M12 A-coding, 5-pin

male)

LCD Display

Display Type
WXGA TFT LED LCD

Display Size 18.5"
Max. Resolution 1366 x 768
Max. Colors 16.7 M
Luminance cd/m² 300
Viewing Angle (H/V°) 170/160
Backlight Life 50,000 hrs

Touchscreen

Light Transmission ≥88%
Resolution 4096*4096 dot
Type Projected capacitive

Environment


■ **Humidity** 10 ~ 95% RH @ 40°C, non-condensing

Note: Tested for 48hrs


Ingress Protection All around IP65
Operating Temperature 0 ~ 55°C (32 ~ 131°F)
Storage Temperature -20 ~ 60°C (-4 ~ 140°F)

Vibration Protection With HDD: 1 Grms (5 ~ 500 Hz) (Operating, random vibration)

Rear View



- a. USB 2.0 with M12 connector b. COM (RS-232) with M12 connector
- c. LAN 1 with M12 connector
- d. LAN 2 with M12 connector e. $24 \, V_{DC}$ input with M12 connector

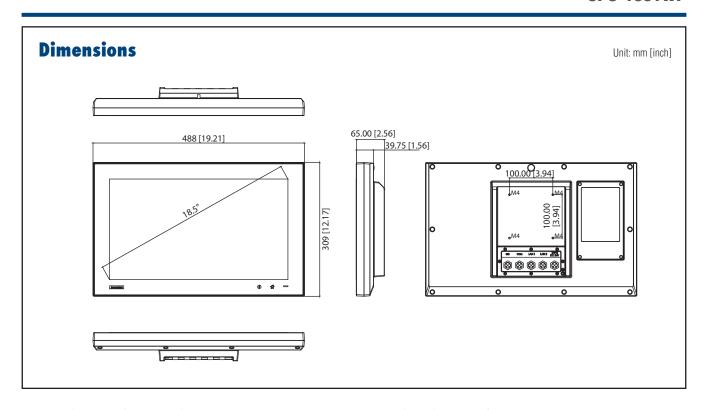

Ordering Information

• SPC-1881WP-433AE 18.5" WXGA stationary Multi-Touch Panel PC, 4GB

Embedded O/S

2070014320 Image WES7P X64 MUI V4.14 B001 for SPC-1881WP

Optional Accessories

1702002600 Power Cable US Plug 1.8 M **1702002605** Power Cable EU Plug 1.8 M **1702031801** Power Cable UK Plug 1.8 M

1700000596 Power Cable China/Australia Plug 1.8 M ■ EWM-W151H01E 802.11bgn RTL8188EE 1T1R, Half-size Mini-PCle

(also need 9656EWMG00E)

• 9656EWMG00E Half-size miniPCle to Full-size miniPCle bracket set **1750007668-01** Waterproof Wireless Antenna R/P SMA.M2dB L=86.7 **1750003418** Wireless Antenna AN2400-5901RS R/P SMA.M9dB

■ SPC-1840WP-MCKE M12 cable accessory kit for SPC series SPC-1840WP-MOKE M12 Connector accessory kit for SPC series

Application Software

WebAccess/SCADA	Advantech WebAccess is a 100% web based SCADA (Supervisory Control And Data Acquisition) software and it acts as an IIoT Platform providing open interfaces for partners to develop IoT applications for different vertical markets. In addition to traditional SCADA functions, WebAccess has an intelligent Dashboard, to provide users with cross-platform, cross-browser data analysis and user interface using HTML5 technology. As well as the built-in widgets, WebAccess also provides Widget Builder to allow customers to build their own.
WebAccess/HMI	WebAccess/HMI is Human Machine Interface (HMI) software based on Microsoft's Windows operating system. It utilizes a PC's ample resources, ie speed, storage, multimedia, peripheral devices, and large screen to produce a complex human-machine interface. WebAccess/HM with its communication and monitoring ability supports more than 350 PLC communication protocols and a wide choice of screen design objects, to satisfy multiple integrations of factory automation and all-round human-machine interface operation and monitoring requirements.