

# 4U-4360

## 4U Rackmount Chassis with 6 Hot-Swap SAS / SATA Trays for RAID



PICMG 1.0

PICMG 1.3


### Features

- Supports up to 6 SAS/SATA HDDs, which can be hot-swappable if a SATA RAID card is used
- Supports either an ATX motherboard or a PICMG backplane up to 15 slots
- Supports one slim optical disk drive and one 3.5" FDD or internal HDD
- LED indicators for LAN connectivity and alarm notification for redundant power supply, HDD activity, system fan and in-chassis temperature
- Reusable, front-accessible filters for easy maintenance

CE FCC RoHS COMPLIANT PRODUCT

### Specifications

Drive Bay	Front-accessible	1
	Slim Optical Drive (Front-accessible)	3.5"
Cooling	Fan	1 (12 cm / 114 CFM) + 2 (8 cm / 47 CFM each) for SAS/SATA storage unit
	Air Filter	Yes
Front I/O Interface	USB	2
Miscellaneous	LED Indicators	System: Power, HDD (for IDE drives only), fan, temperature, LAN1 and LAN2 SAS/SATA HDD trays: HDD power and activity
	Rear Panel	Backplane version: One 9-pin D-Sub opening Motherboard version: Five 9-pin D-Sub and one 68-pin SCSI openings
Environment	Operating Temperature	0 ~ 40° C (32 ~ 104° F)
	Non-Operating Temperature	-20 ~ 60° C (-4 ~ 140° F)
	Humidity	10 ~ 85% @ 40° C, non-condensing
	Non-Operating Humidity	10 ~ 95% @ 40° C, non-condensing
	Vibration (5 ~ 500 Hz)	1 Grms
Shock		2 G
		10 G (with 11 ms duration, half sine wave)
Physical Characteristics	Dimensions (W x H x D)	482 x 177 x 501 mm (19" x 7" x 19.8")
	Weight	19.0 kg (41.8 lb)




Power HDD Temp. Fan LAN1 LAN2



Rear view of ACP-4360MB



Easy-to-maintain system fan

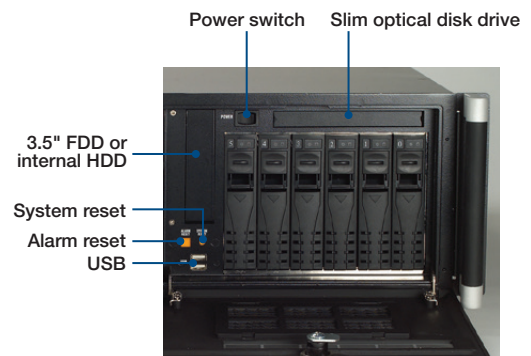

Six hot-swappable SAS/SATA HDD trays

