


# PCI-1203

## 2-port EtherCAT Universal PCI Master Card

NEW

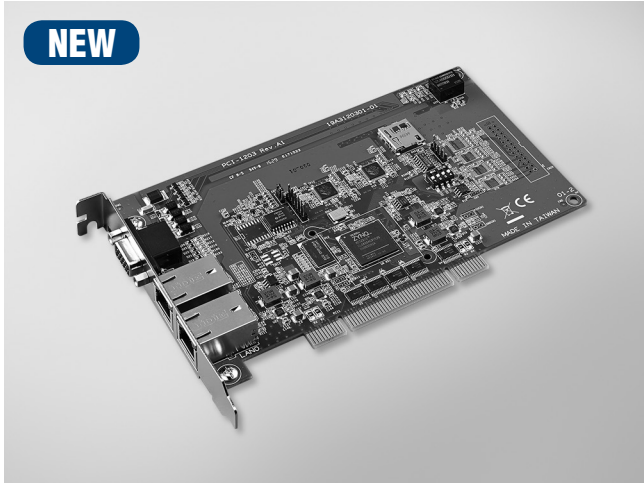

### Features

- 650MHz dual-core ARM processor
- 2 x EtherCAT ports for high-performance of Motion and I/O applications
- Supports common motion SDK for rapid application development
- Up to 32 axes support for motion control
- Supports a maximum of 6 motion groups and 8 axes per group
- Supports on board 8-CH isolated DI and 4-CH isolated DO
- Diagnostics for fast error handling can trace command and error message

### Introduction

The PCI-1203 is a 2-port EtherCAT PCI Universal card. It is a ready-to-use EtherCAT development platform for all PC-based industrial automation. The EtherCAT protocol stack is executed autonomously on the PCI card.

It allows the host to handle up to two EtherCAT networks with extremely short cycle time for Motion and pure I/O applications. For EtherCAT motion port, communication cycle time is no more than 500  $\mu$ s for connecting 32 axes of servo motors and for fast I/O ports the cycle time is no more than 200us in a high speed I/O system. There are 4 - channel isolated digital outputs and 8 - channel isolated inputs on the PCI-1203 to meet the extra high speed I/O requirements. Real-time and high-precision capability are features of PCI-1203. In addition, all Advantech motion controllers use the "Common Motion API" architecture which is a unified user programming interface and graphical utility. This architecture saves application maintenance and upgrades. Programmers can benefit from using any Advantech SoftMotion controller without changing large amounts of the application code. User-friendly examples decrease programming load, helping users complete configuration and diagnosis easily.

### Specifications

#### EtherCAT

- **Number of Rings** 2 (Motion x 1, I/O x 1)
- **Cable Type** CAT5 UTP/STP Ethernet cable and above
- **Cycle Time** Motion: 500  $\mu$ s  
I/O: 200  $\mu$ s
- **Communication Motion Slave** 32 Servo Drive Max.(eq. Panasonic A5B)
- **Communication IO Slave** 128 port DI (128 byte) / 128 port DO (128 byte)  
128 channel AI (256 byte) and 128 channel AO (256 byte) (based on ADAM-5000/ECAT)

#### Isolated Digital Input

- **Channels** 8
- **Input Voltage** Logic 0: 5 V max.  
Logic 1: 6 V min. (24V max.)  
Needs 24V<sub>DC</sub> external power
- **Isolation Protection** 1,000 V<sub>DC</sub>
- **Input Resistance** 8.4 k  $\Omega$

#### Isolated Digital Output

- **Channels** 4
- **Output Type** Sink
- **Isolation Protection** 1,000 V<sub>DC</sub>
- **Output Voltage** 12 ~ 24 V<sub>DC</sub>
- **Sink Current** Max: 300 mA CH

#### General

- **Bus Type** Universal PCI V2.2
- **Certification** CE, FCC Class A
- **Connectors** 2 x RJ45, 1 x D-sub 15
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** 5 V<sub>DC</sub> @ 0.5 A typical
- **Humidity** 5 ~ 95% RH, non-condensing (IEC 60068-2-3)
- **Operating Temp.** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temp.** -20 ~ 85°C (-4 ~ 185°F)

### Ordering Information

- **PCI-1203-06AE** 2-port EtherCAT 6-axis Universal PCI Master Card
- **PCI-1203-10AE** 2-port EtherCAT 10-axis Universal PCI Master Card
- **PCI-1203-16AE** 2-port EtherCAT 16-axis Universal PCI Master Card
- **PCI-1203-32AE** 2-port EtherCAT 32-axis Universal PCI Master Card